


## Accumulator 075210SS with exchangeable diaphragm

### Technical data

Operating pressure:	max. 210 bar
Gas filling (nitrogen only):	max. 90% of min. operating pressure
Admissible pressure ratio:	max. $\leq 6/1$
Operating temperature:	-20 +80°C
Mounting:	vertical/horizontal
<b>Standard construction characteristics</b>	
Material of body:	forged steel
Diaphragm:	NBR
Gas connection valve:	M28x1.5
Painting:	anti-rust primer
Test:	on request

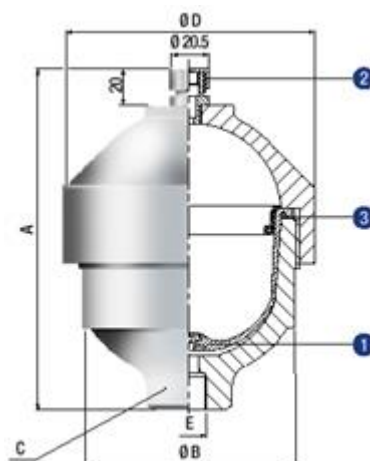

### Dimensions

Type		Pressure	P.F.C.	Gas valve	A	ØB	C	ØD	Weight
	cm <sup>3</sup>	max bar	E			mm			kg
LAV 0.75	750	210	M18x1.5	M28x1.5	190	115	41	137	5.6

The number of cycles is inversely proportional with the increase of the pressure relationship.



# PIJTTERSEN

Pijtersen B.V.  
Stavangerweg 14A  
9723 JC Groningen  
Tel. : +31 (0)508-200963  
BTW: NL002166811B01

KVK: 01013855  
BIC: ABNANL2A  
IBAN: NL56ABNA0482164727  
E-Mail: [info@pijtersen.nl](mailto:info@pijtersen.nl) / [info@catpumps.nl](mailto:info@catpumps.nl)  
Internet: [www.pijtersen.nl](http://www.pijtersen.nl) / [www.catpumps.nl](http://www.catpumps.nl)