




PIJTTERSEN

E-mail : info@pijtersen.nl / info@catpumps.nl
Internet: www.pijtersen.nl / www.catpumps.nl

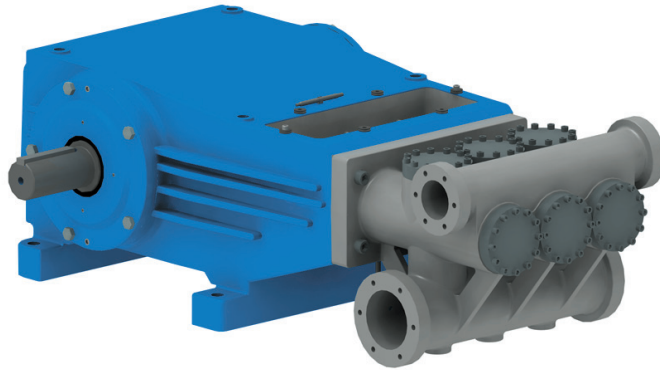

FEATURES

- Triplex design delivers high efficiency and low pulsation.
- Durable dual V-Packings are lubricated and cooled by pumped liquid.
- Pre-Set Lo-Pressure Seals provide secondary protection against external leaks and require no packing adjustment.
- Special high density, polished, concentric plungers provide a true wear surface and extended seal life.
- Specially formulated Seals and V-Packings offer unmatched performance and extended seal life.
- Ceramic plungers, Seals and V-Packings are serviceable from the top of the crankcase permitting easy in-field servicing.

COMMON SPECIFICATIONS

Inlet Pressure Range.....	Flooded to 50 psi	(Flooded to 3.5 bar)
Minimum rpm.....	75 rpm	(75 rpm)
Stroke.....	5.91"	(150 mm)
Crankcase Capacity.....	22.4 Gals	(85 l)
Lubrication.....	Splash	(splash)
Maximum Temperature	140°F	(60°C)
Inlet Ports (2) (Flange Required)	6.0"	(150 mm)
Discharge Ports (2) (Flange Required)	4.0"	(100 mm)
Shaft Diameter	3.397"	(100 mm)
Shaft Length.....	8.150"	(207 mm)
Weight.....	3087 Lbs	(1400 kg)
Dimensions.....	68.9 x 42.1 x 22"	(1750 x 1069 x 560 mm)

⚠ CAUTIONS AND WARNINGS

All High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices could result in personal injury or damage to pump or property. CAT PUMPS does not assume any liability or responsibility for the operation of a customer's high pressure system.

Read all CAUTIONS and WARNINGS before commencing service or operation of any high pressure system. The CAUTIONS and WARNINGS are included in each service manual and with each Accessory Data sheet. CAUTIONS and WARNINGS can also be viewed online at www.catpumps.com/cautions-warnings or can be requested directly from CAT PUMPS.

WARRANTY

View the Limited Warranty on-line at www.catpumps.com/warranty.

150 Frame R-Series Duplex Stainless Steel Reciprocating Process Pump

Models

157R060 157R080

SPECIFICATIONS

U.S. Measure

Metric Measure

STANDARD 157R060

Flow	100 gpm	(378 l/m)
System Pressure*	2700 psi	(185 bar)
Maximum rpm.....	310 rpm	(310 rpm)
Bore	2.375"	(60.3 mm)

API

Flow	87 gpm	(329 l/m)
Barrels Per Day (U.S., Petroleum) 2983 bbl/d		(—)
System Pressure*	2700 psi	(185 bar)
Maximum rpm.....	270 rpm	(270 rpm)
Bore	2.375"	(60.3 mm)

STANDARD 157R080

Flow	200 gpm	(757 l/m)
System Pressure*	1560 psi	(108 bar)
Maximum rpm.....	355 rpm	(355 rpm)
Bore	3.150"	(80 mm)

API

Flow	152 gpm	(575 l/m)
Barrels Per Day (U.S., Petroleum) 5211 bbl/d		(—)
System Pressure*	1560 psi	(108 bar)
Maximum rpm.....	270 rpm	(270 rpm)
Bore	3.150"	(80 mm)

* Relief pressure should be set at maximum 10% over system pressure.


ELECTRIC HORSEPOWER REQUIREMENTS

MODEL	FLOW		PRESSURE					RPM
			psi 1000	psi 1500	psi 2000	psi 2500	psi 2700	
	U.S. gpm	l/m	bar 70	bar 105	bar 140	bar 175	bar 185	
157R060	100	378	69	103	137	172	185	310
157R060 API	87	329	59	89	118	148	159	270
157R080	200	757	137	205	274	342	370	355
157R080 API	152	575	104	156	208	260	281	270

PARTS LIST

ITEM	PART NUMBER		DESCRIPTION		QTY
	157R060	MATL	157R080	MATL	
1	891101	—	891101	—	Drive-end w/o Plungers (Includes: Items 2 thru 80, 349, 351, 352)
2	890602	STL	890602	STL	Key (M28x16x170)
3	891238	STL	891238	STL	Screw, Grub (M20x20)
4	891275	SS	891275	SS	Plate, Serial No. (Not Shown)
5	891228	STL	891228	STL	Screw, HH (M20x60)
8	891235	F	891235	F	Cover, Bearing
10	890215	FPM	890215	FPM	O-Ring, Bearing Cover - 70D
11	890270	NBR	890270	NBR	Seal, Oil
12	890230	POP	890230	POP	Shim Set
15	891240	STL	891240	STL	Bearing, Roller
20	891360	HS	891360	HS	Rod, Connecting Assy (Incls: 2-Sleeves, 2-Washers, 2-Screws)
25	891361	CM	891361	CM	Crankshaft, Single End
30	891230	F	891230	F	Cover, Bearing, Blind
32	891234	NY	891234	NY	Cap, Filler w/Gasket
35	891226	SS	891226	SS	Rivet, (M2.9x6.5) (Not Shown)
36	891202	SS	891202	SS	Nameplate (Not Shown)
37	891233	—	891233	—	Gauge, Oil Bubble w/Gasket
40	890295	STL	890295	STL	Screw, HH (M16x50)
42	891237	SS	891237	SS	Washer, Flat (M8)
43	891225	SS	891225	SS	Screw, HSH (M8x15)
45	891243	SS	891243	SS	Screw, Grub (M10x20) (Not Shown)
48	891232	AL	891232	AL	Plug, HH Drain
50	891250	F	891250	F	Cover, Rear
52	891244	STL	891244	STL	Screw, Grub (M16)
53	891272	F	891272	F	Crankcase
55	891203	SS	891203	SS	Pin, Guide (M16x50) (Not Shown)
60	891201	—	891201	—	Cover, Rod Box
61	891224	SS	891224	SS	Screw, HSH (M10x15)
62	891282	STL	891282	STL	Pin, Roll (M6x25)
63	891280	F	891280	F	Crosshead
64	891281	STL	891281	STL	Pin, Crosshead
65	891261	SS	891261	SS	Rod, Plunger
66	891236	RBR	891236	RBR	Grommet, Cover
70	890275	PTFE	890275	PTFE	Seal, Oil - 70D
77	890216	FPM	890216	FPM	O-Ring, Carrier
80	891255	SS	891255	SS	Carrier, Oil Seal
89	891122	SSD	891132	SSD	Assy, Plunger, Conversion (Incls: 90,102,104,105,106,118,124,127,129,130,145)
90	890401	CC	—	—	Plunger (M60.3x262)
	—	—	890402	CC	Plunger (M80x262)
102	890372	NAB	890371	NAB	Adjuster, Packing
104	890203	NBR	890204	NBR	O-Ring, Spacer - 70D
	890227	FPM	890314	FPM	O-Ring, Spacer - 70D
105	890580	SSD	890332	SSD	Case, Seal [01/11]
106	890565	NBR	890566	NBR	Seal, LPS
	890561	FPM	890563	FPM	Seal, LPS
118	890389	SSD	890389	SSD	Plug, 1/16"NPT
124	890352	SSD	890351	SSD	Housing, Seal
127	890520	SFTK	890521	SFTK	V-Packing, Set
129	890202	NBR	890202	NBR	O-Ring, Housing - 70D
	890228	FPM	890228	FPM	O-Ring, Housing - 70D
130	890591	PTFE	890591	PTFE	Back-up-Ring, Housing
145	890589	D	890589	D	Ring, Sealing
164	890259	SS	890259	SS	Seat, QV
166	890250	SSSS	890250	SSSS	Valve, QV
167	890319	SS	890319	SS	Spring
171	890300	SS	890300	SS	Nut, QV
172	890225	NBR	890225	NBR	O-Ring, Plug - 70D
	890245	FPM	890245	FPM	O-Ring, Plug - 70D
174	890292	SSD	890292	SSD	Plug, Valve, Inlet
175	890222	STTC	890222	STTC	Screw, HSH (M12x55)
176	891294	SSD	891294	SSD	Plug, Valve, Discharge
185	892009	SSD	892009	SSD	Head, Manifold
188	891273	STTC	891273	STTC	Screw, HSH (M24x100)
200	892016	POP	892016	POP	Barb, 1/4" NPT x 1/4" Barb
201	892018	RBR	892018	RBR	Hose, 9"x1/4" LOP
202	892019	SS	892019	SS	Clamp, 1/4" Hose
290	890999	—	890999	—	Loctite® 641, 10ML (Not Shown)
	890997	—	890997	—	Loctite® 243, 10ML (Not Shown)
297	891151	SSD	891151	SSD	Assembly, Head (Incls: 164 thru 202)
300	890036	NBR*	890037	NBR	Kit, Seal (Incls: 70,77,104,106,127)
310	890018	NBR	890018	NBR	Kit, Valve w/o Seat (Incls: 166,167,171,172,290)
	890019	NBR	890019	NBR	Kit, Valve (Incls: 164,166,167,171,172,290)
349	891231	SS	891231	SS	Screw, HSH (M3x5)
351	890990	SS	890990	SS	Tool, Packing Adjuster
352	890998	STZP	890998	STZP	Clip, Tool
390	719500	SS	719500	SS	C.A.T. (Inlet pressure stabilizer for RO and boosted inlet applications)
	890700	SS	890702	SS	Valve, Relief 2"
	701550	SS	—	—	Dampener, Pulsation (NBR Bladder)

EXPLODED VIEW

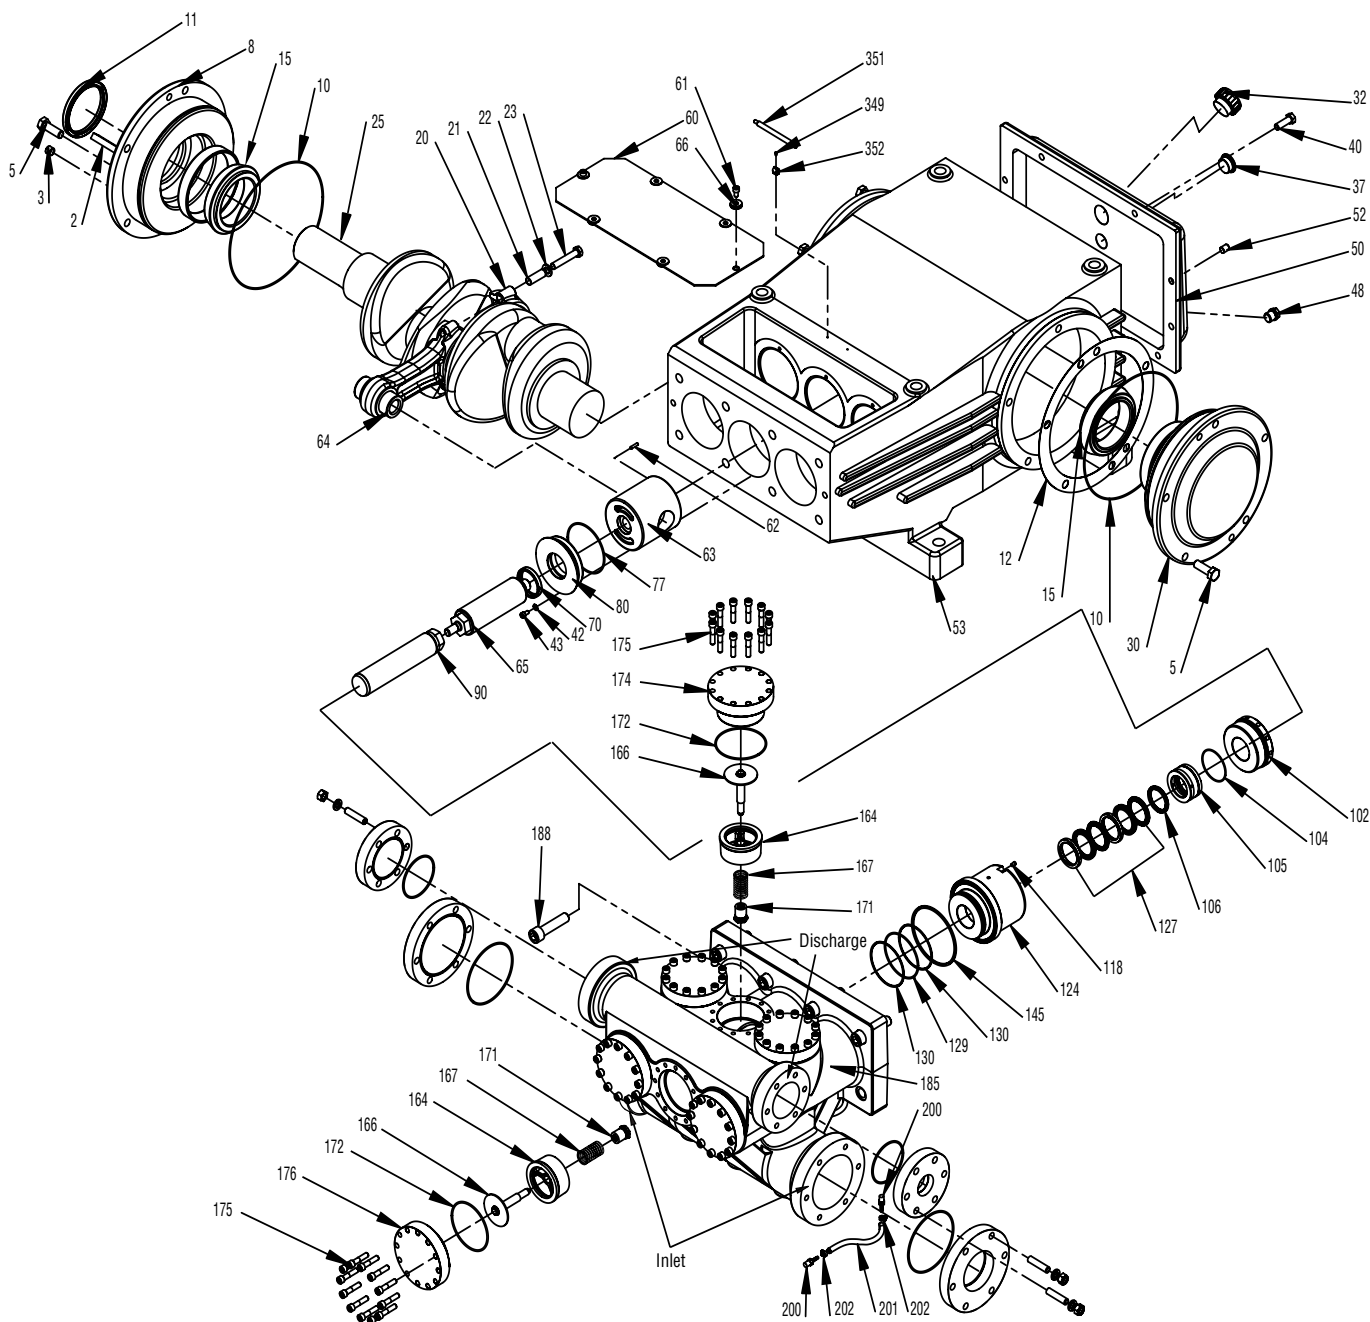


Model
Duplex Stainless Steel
157R060, 157R080
January 2011


ITEM	PART NUMBER		DESCRIPTION		QTY
	157R060	MATL	157R080	MATL	
393	892092	SS	892092	SS	1
394	892093	SS	892093	SS	1
395	892096	SS	892096	SS	1
396	892088	SS	892088	SS	1
—	6119	—	6119	—	1
—	6116	—	6116	—	1-2
			<i>Flange, Blank, Inlet (Specify Flange Type When Ordering)</i> <i>Flange, Blank, Discharge ((Specify Flange Type When Ordering)</i> <i>Flange, Discharge 2" NPT ((Specify Flange Type When Ordering)</i> <i>Flange, Inlet 3" NPT (Specify Flange Type When Ordering)</i> <i>Lubricant, Antiseize (1oz.)</i> <i>Oil, Drum (16 gal.) ISO 100 Multiviscosity Hydraulic</i> <i>(Fill to specified crankcase capacity prior to start-up)</i>		

Loctite is a registered trademark of Henkel Corporation.

Bold print part numbers are unique to a particular pump model. italics are optional items. *Review material codes for individual items (SFTK generally may be used as alternate). MATERIAL CODES (Not Part of Part Number): AL=Aluminum CC=Ceramic CM=Chrome-Moly D=Acetal F=Cast Iron FPM=Fluorocarbon HS=High Strength NAB=Nickel Aluminum Bronze NBR=Medium Nitrile (Buna-N) NY=Nylon POP=Polypropylene PTFE=Pure Polytetrafluoroethylene RBR=RubberSFTK=Polytetrafluoroethylene/Aramid Fiber Blend SS=316SS SSSS=404SS SSD=Duplex Stainless STL=Steel STTC=Steel PTFE Coated STZP=Steel/Zinc Plated

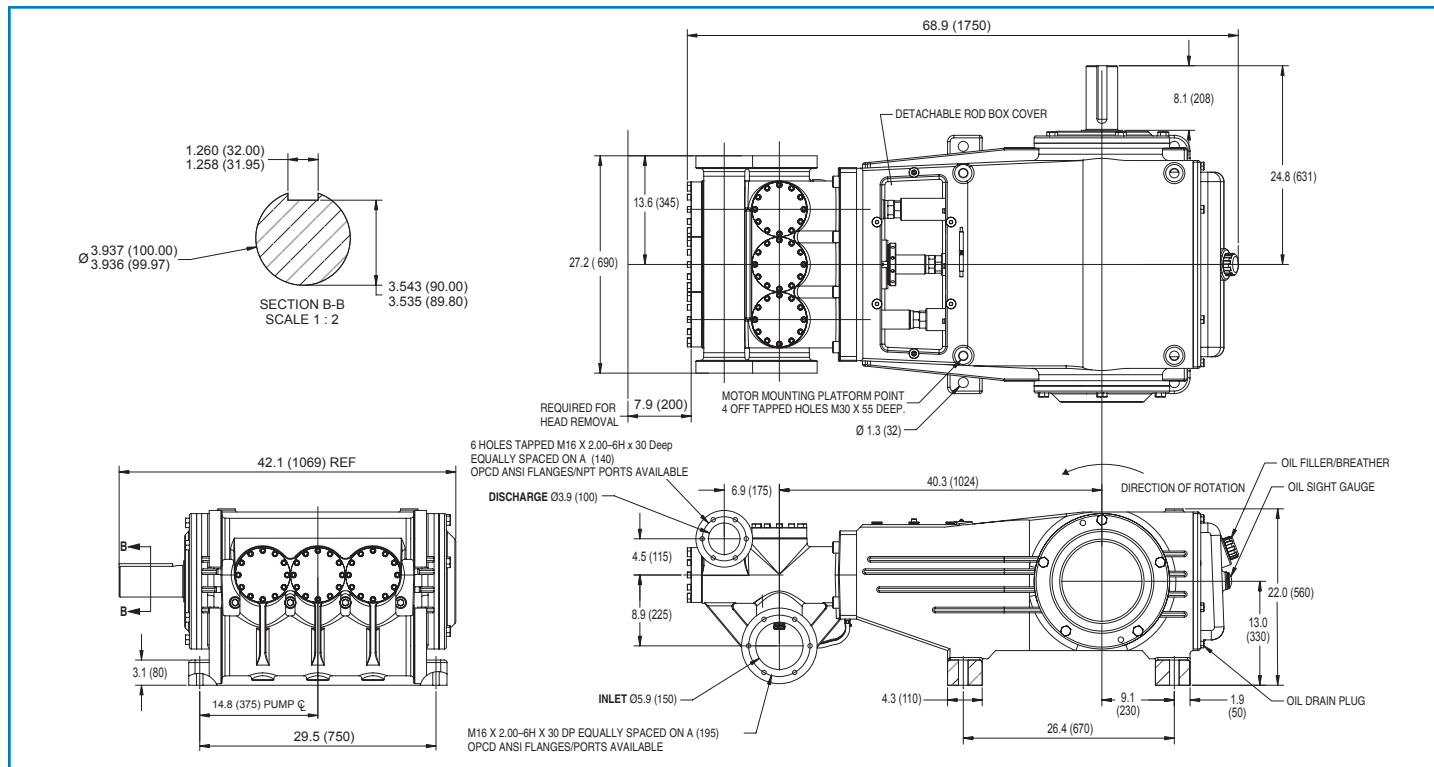

Models 157R060, 157R080

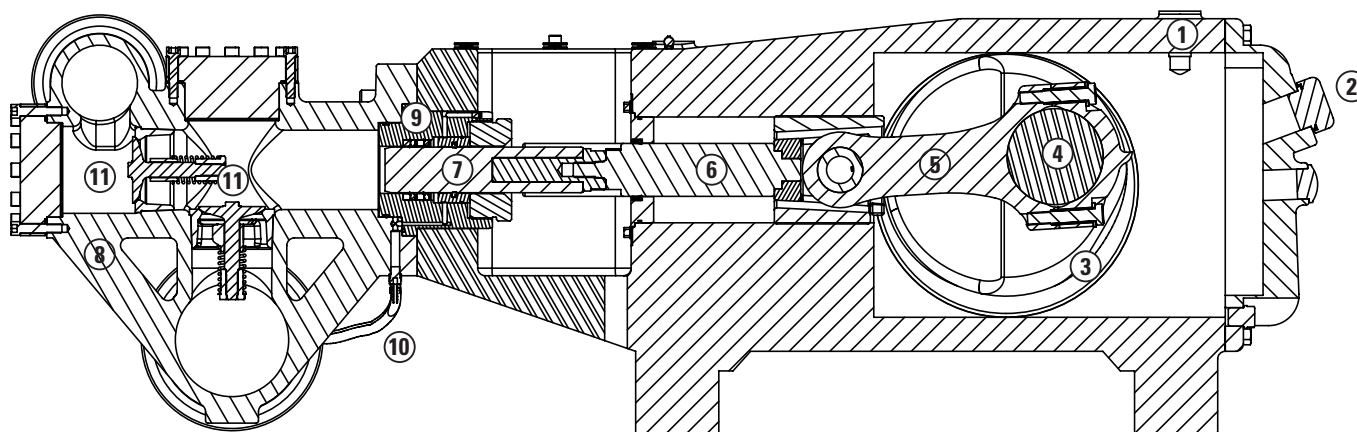

- 1 Spheroid graphite cast iron **crankcase** provides strength, vibration dampening and flame and spark resistance.
- 2 Convenient top rear access for **oil filler cap** permits easy access to oil level check.
- 3 Heavy-duty tapered roller crankshaft **bearings** for long life and secure alignment.
- 4 Chrome-moly, nitrided **crankshaft** provides unmatched strength and surface hardness for long life.

- 5 Matched oversized, **connecting rods** noted for superior tensile strength and bearing quality.
- 6 Special 316SS **plunger rods** with high-strength crossheads for longevity and corrosion resistance.
- 7 Special concentric, hardened, polished solid ceramic **plungers** offer resistance to corrosion and a true sealing surface for extended seal life. Plungers are conveniently serviceable from the top of the pump.

- 8 **Manifolds** are a high-strength, corrosion resistant Duplex stainless steel alloy for compatibility and long life.
- 9 High integrity **V-Packings** of PTFE/ Aramid Fiber Blend require no-adjustment and provide long life with harsh liquids.
- 10 High pressure V-Packing **bleed (weep) hose** captures leaks as V-Packings begin to wear preventing external leaks.
- 11 316 stainless steel **seats, valves and springs** for corrosion resistance and extended life.



PIJTTERSEN

Pijtersen B.V.
Stavangerweg 14A
9723 JC GRONINGEN
THE NETHERLANDS

Tel.: +31 (0)50-8200963
E-mail : info@pijtersen.nl / info@catpumps.nl
Internet: www.pijtersen.nl / www.catpumps.nl

