




UR25 – VUILFREZEN - ROTATING NOZZLE 1/4 BSP F – 250BAR

- Min. werkdruk 80 bar - 8 MPa 1150 psi
- Max. werkdruk 250 bar - 25 MPa 3650 psi
- Min.debiet 6 l/min (03 - 80 bar)
- Max. debiet 29 l/min (08 - 250 bar)
- Max. temperatuur 100 °C - 212 °F
- Min. Temperatuur 5 °C - 41 °F

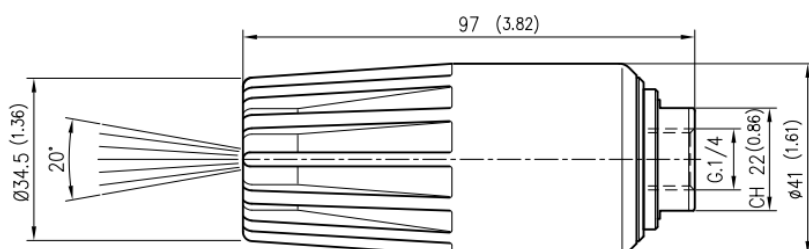

Artikel nummer Pijttersen	Artikel nr. PA	Nozzle Size	Inlaat Aansluiting	Gewicht Gram	Kleur (stip aan de voorzijde)
007255.30	25.1620.30	03	1/4 Bsp F	410	Wit
007255.35	25.1620.35	035	1/4 Bsp F	410	Bruin
007255.40	25.1620.40	04	1/4 Bsp F	410	Donker geel
007255.45	25.1620.45	045	1/4 Bsp F	410	Blauw
007255.50	25.1620.50	05	1/4 Bsp F	411	Licht paars
007255.55	25.1620.55	055	1/4 Bsp F	412	Donker rood
007255.60	25.1620.60	06	1/4 Bsp F	411	Donker groen
007255.65	25.1620.65	065	1/4 Bsp F	410	Licht blauw
007255.70	25.1620.70	07	1/4 Bsp F	412	Oranje
007255.80	25.1620.80	08	1/4 Bsp F	410	Silver



PIJTTERSEN

Pijttersen B.V.
 Stavangerweg 14A
 9723 JC Groningen
 Tel. : +31 (0)508-200963
 BTW: NL002166811B01

KVK: 01013855
 BIC: ABNANL2A
 IBAN: NL56ABNA0482164727
 E-Mail: info@pijttersen.nl / info@catpumps.nl
 Internet: www.pijttersen.nl / www.catpumps.nl