




UR50 – VUILFREZEN - ROTATING NOZZLE 1/4 BSP F – 500BAR

- Min. werkdruk 80 bar - 8 MPa 1150 psi
- Max. werkdruk 500 bar - 50 MPa 7000 psi
- Max. temperatuur 90 °C - 194 °F
- Min. Temperatuur 5 °C - 41 °F

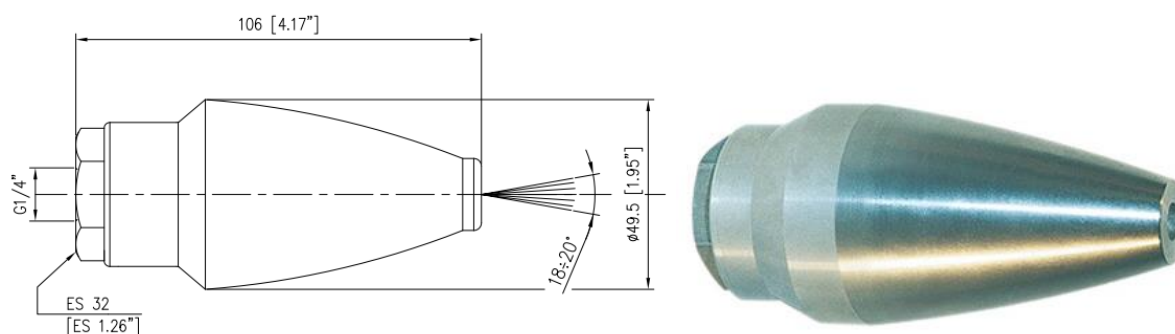

Artikel nummer Pijttersen	Artikel nr. PA	Nozzle Size	Inlaat Aansluiting	Gewicht Gram	Kleur (stip aan de voorzijde)
007275.30	25.1750.30	03	1/4 Bsp F	677	Wit
007275.40	25.1750.40	04	1/4 Bsp F	722	Donker geel
007275.45	25.1750.45	045	1/4 Bsp F	726	Blauw
007275.50	25.1750.50	05	1/4 Bsp F	725	Licht paars
007275.55	25.1750.55	055	1/4 Bsp F	724	Donker rood
007275.60	25.1750.60	06	1/4 Bsp F	680	Donker groen
007275.65	25.1750.65	065	1/4 Bsp F	678	Licht blauw
007275.70	25.1750.70	07	1/4 Bsp F	720	Oranje
007275.12	25.1750.12	12	1/4 Bsp F	655	
007275.14	25.1750.14	14	1/4 Bsp F	655	
007275.16	25.1750.16	16	1/4 Bsp F	714	



PIJTTERSEN

Pijttersen B.V.
 Stavangerweg 14A
 9723 JC Groningen
 Tel. : +31 (0)508-200963
 BTW: NL002166811B01

KVK: 01013855
 BIC: ABNANL2A
 IBAN: NL56ABNA0482164727
 E-Mail: info@pijttersen.nl / info@catpumps.nl
 Internet: www.pijttersen.nl / www.catpumps.nl